


- 1 - Centre console
- 2 - Armrest



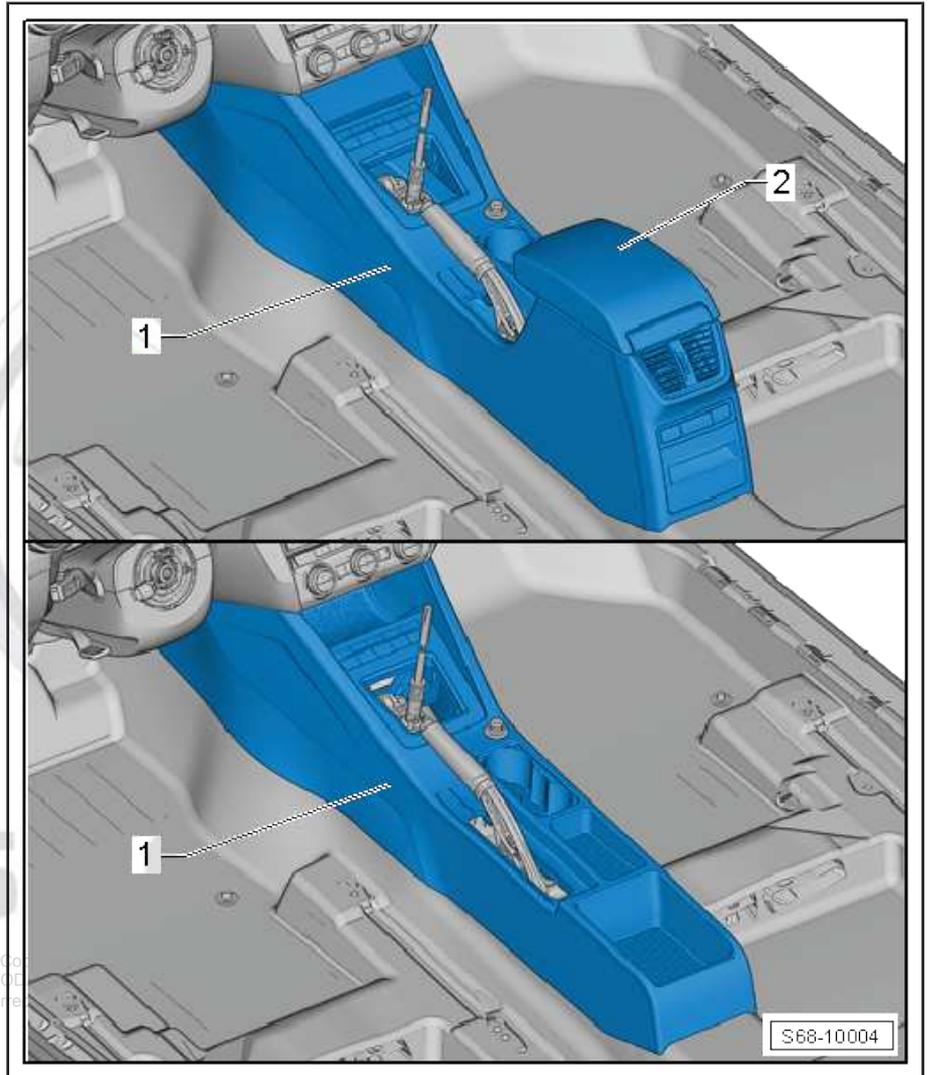

3.2 Removing and installing centre console

3.2.1 Removing and installing the centre console without armrest

1 - Left trim

2 - Centre console

Removing and installing
⇒ [page 12](#) .

3 - Damping

4 - Cap of handbrake

5 - Screw

□ 1.5 Nm.

6 - Screw

□ 1.5 Nm.

7 - Screw

□ 1.5 Nm.


8 - Right trim

9 - Cap

□ The fixing screw for the
centre console is located
under the cap.

10 - Screw


□ 1.5 Nm.

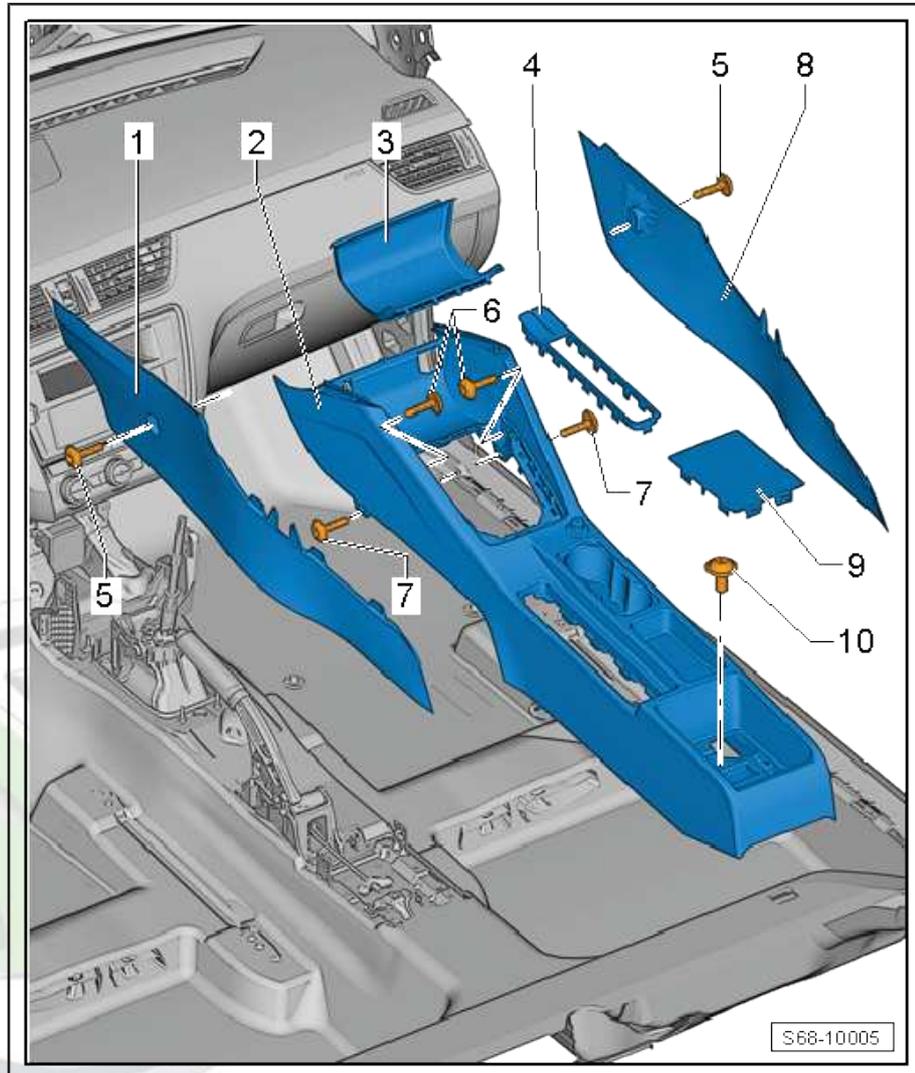

Removing

- Switch off the ignition and all electrical components.
- Unscrew the screws (Pos. 5) for the centre console trim in the footwell and pull off both panels downwards.
- Remove screws (Pos. 7).
- Unclip the switch cover trim and remove the ⇒ gearbox; Rep. gr. 34 .
- Remove screws (Pos. 6).
- Unclip the cover (Pos. 9) and remove the screw (Pos. 10).
- Apply handbrake fully.
- Unclip the cap on the handbrake (Pos. 4).
- If the console is equipped with Phonebox, disconnect the antenna.

- Partially raise the centre console at the rear, disconnect the cigarette lighter plug connection (socket) => Electrical system - general information; Rep. gr. 96 .
- Tilt the centre console - 1 - upwards at the back and unclip it by pulling it backwards out of the holders for the dash panel - 2 -.
- If the console is provided with a storage compartment with a lid, disconnect the front glove compartment light connector => Electrical system - general information; Rep. gr. 96 .
- Remove centre console from vehicle.

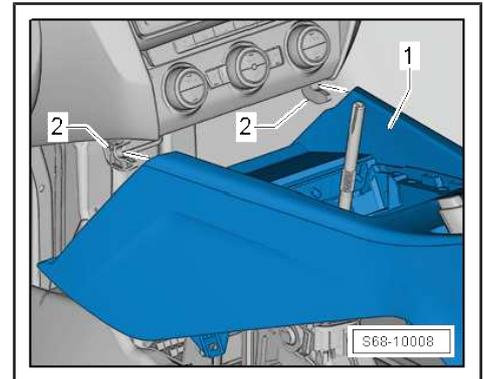

Installing

- Installation is carried out in the reverse order.

3.2.2 Removing and installing the centre console with armrest

1 - Left trim


2 - Centre console

Removing and installing
 => [page 14](#) .

3 - Storage tray

Removing

- Remove the side trim (Pos. 4).
- Unclip the switch cover => Gearbox; Rep. gr. 34 .
- Remove the antenna connector from the right side through the opening in the centre console (depending on the equipment).
- Unclip the storage tray in the front area and slide it out slightly upwards.
- Close the sliding hood for the storage tray and slide it forwards gradually.
- By gradually sliding out the storage tray, also gradually open the sliding hood so that the space above the storage tray is released.

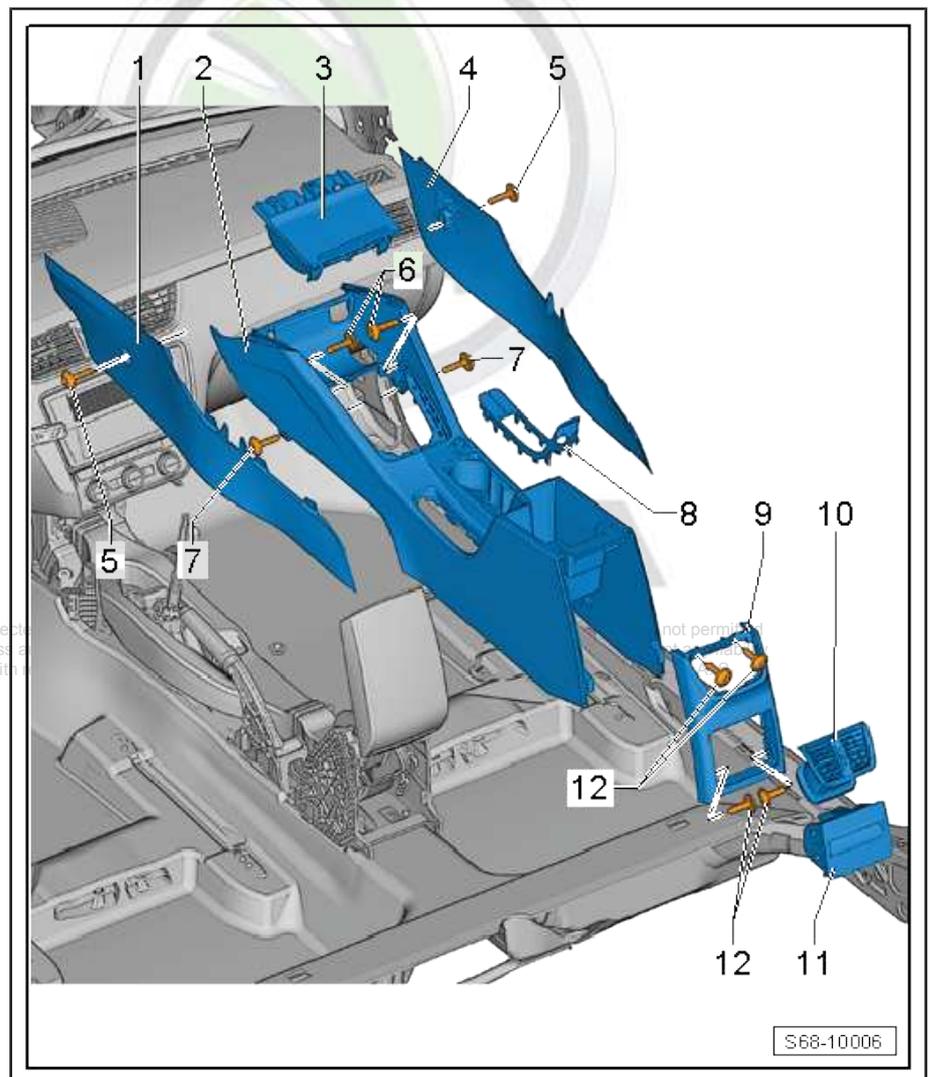

- After sliding out, disconnect the connector for the glove compartment light.
- Remove the storage tray from the centre console.

Installing

- Installation is carried out in the reverse order.



4 - Right trim

5 - Screw

- 1.5 Nm.

6 - Screw

- 1.5 Nm.

7 - Screw

- 1.5 Nm.

8 - Cap of handbrake

- Clipped onto centre console.

9 - Rear support



Note

Removal of the rear support differs depending on the equipment level.

10 - Rear flow vent

- Clipped to rear support.

11 - Rear storage compartment / ashtray

- Clipped to rear support.

12 - Screw

- 1.5 Nm.



Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted without the prior written permission of ŠKODA AUTO A. S. ŠKODA AUTO A. S. does not guarantee or accept any liability for respect to the correctness of information in this document. Copyright by ŠKODA AUTO A. S.

Removing


- Switch off the ignition and all electrical components.




Note

Removal of the rear support differs depending on the equipment level.

- Unclip the rear flow vent - 1 - from the rear support.

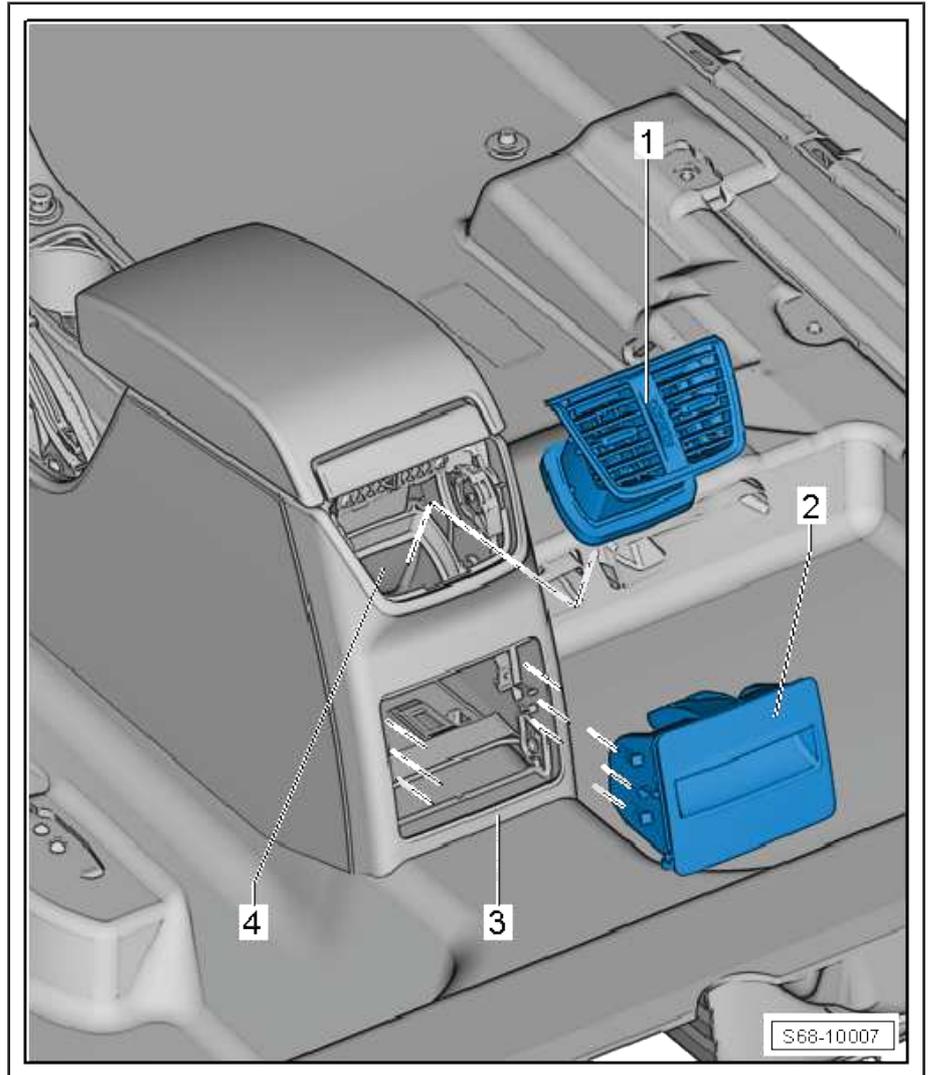

- Remove the complete rear storage tray behind / ashtray - 2 - while disconnecting the cable for the light.
- Remove rear seat heating switch and disconnect the connectors ⇒ Electrical system - general information; Rep. gr. 96 .
- Remove the socket housing of the inverter.
- Unscrew the screws - 1 - for the rear support - 2 - pull out the support to the rear, in - the direction of the arrow - .

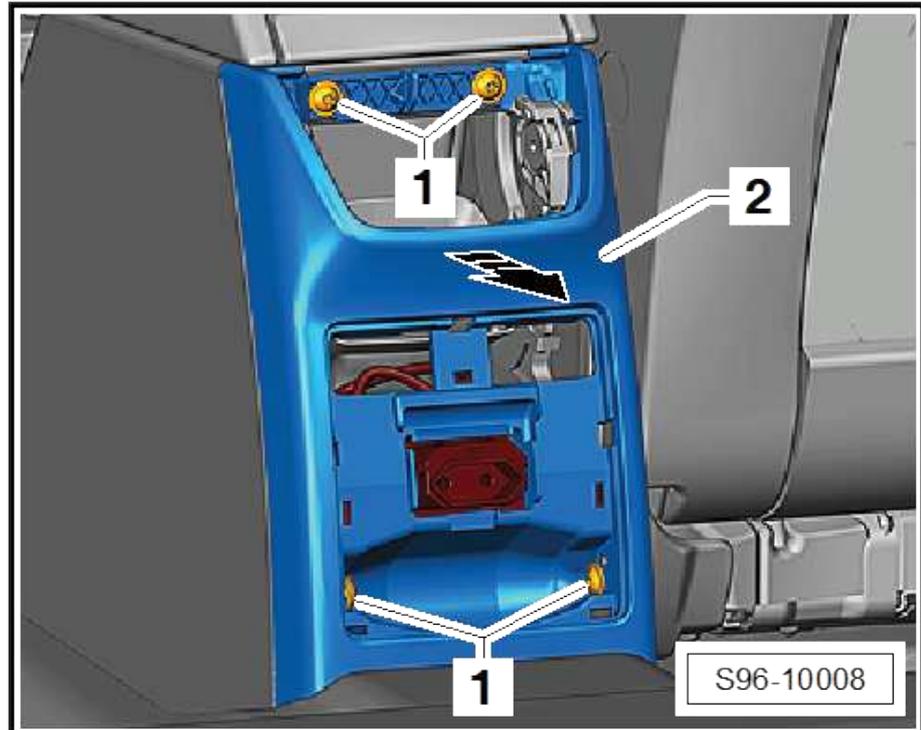


- Remove the retaining spring and disconnect the socket (230V) from the rear support ⇒ Electrical system - general information; Rep. gr. 96 .
- Unscrew the screws - 5 - for the centre console trim in the footwell and pull both trim panels downwards and off.




ŠKODA

Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by ŠKODA AUTO A. S. ŠKODA AUTO A. S. does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by ŠKODA AUTO A. S.

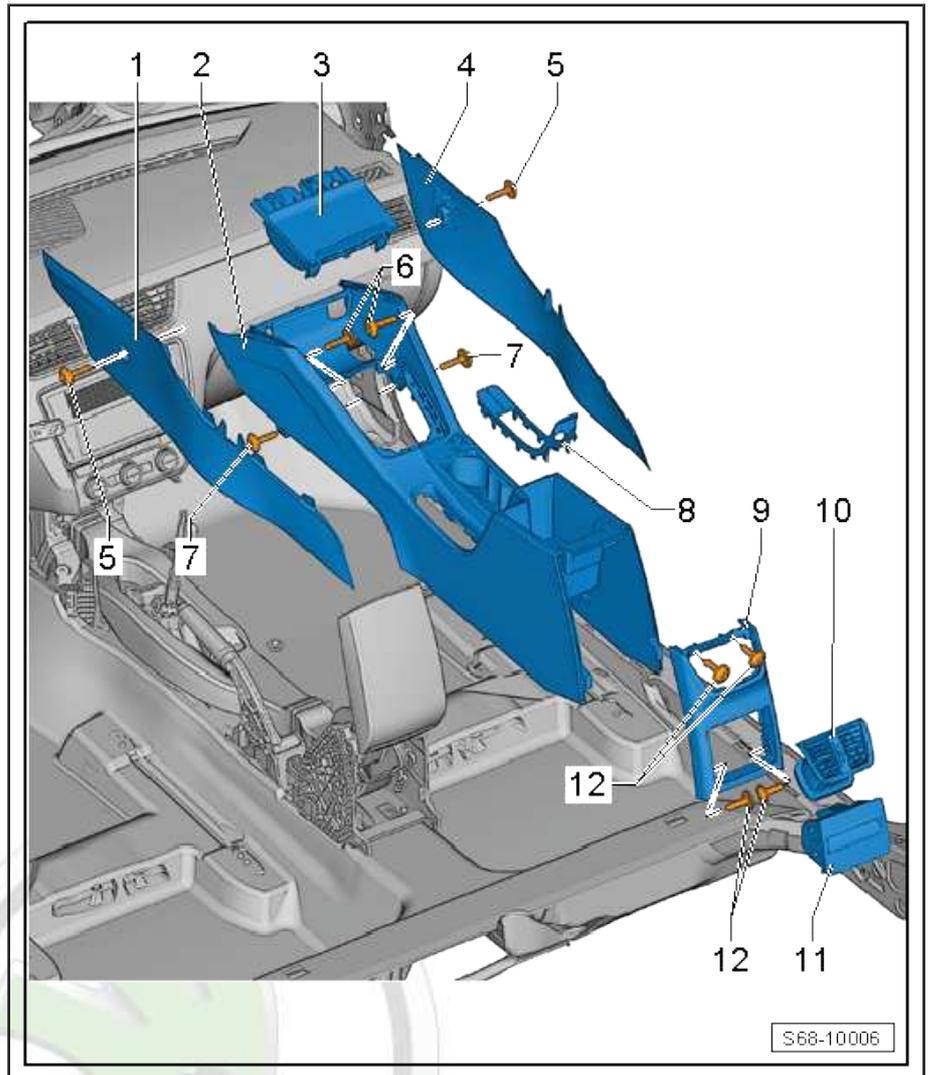

- Unscrew screws -7-.
- Unclip the switch cover trim and remove the ⇒ gearbox; Rep. gr. 34 .
- Unscrew screws -6-.
- If the console is equipped with Phonebox, disconnect the antenna ⇒ Electrical system - general information; Rep. gr. 96 .
- Partially raise the centre console at the rear, disconnect the cigarette lighter plug connection (socket 12 V) ⇒ Electrical system - general information; Rep. gr. 96 .
- Apply handbrake fully.
- Unclip the handbrake cuff ⇒ 8 ⇒ from the centre console.
- Tilt the centre console ⇒ 1 ⇒ upwards at the back and unclip it by pulling it backwards out of the holders for the dash panel ⇒ 2 ⇒.

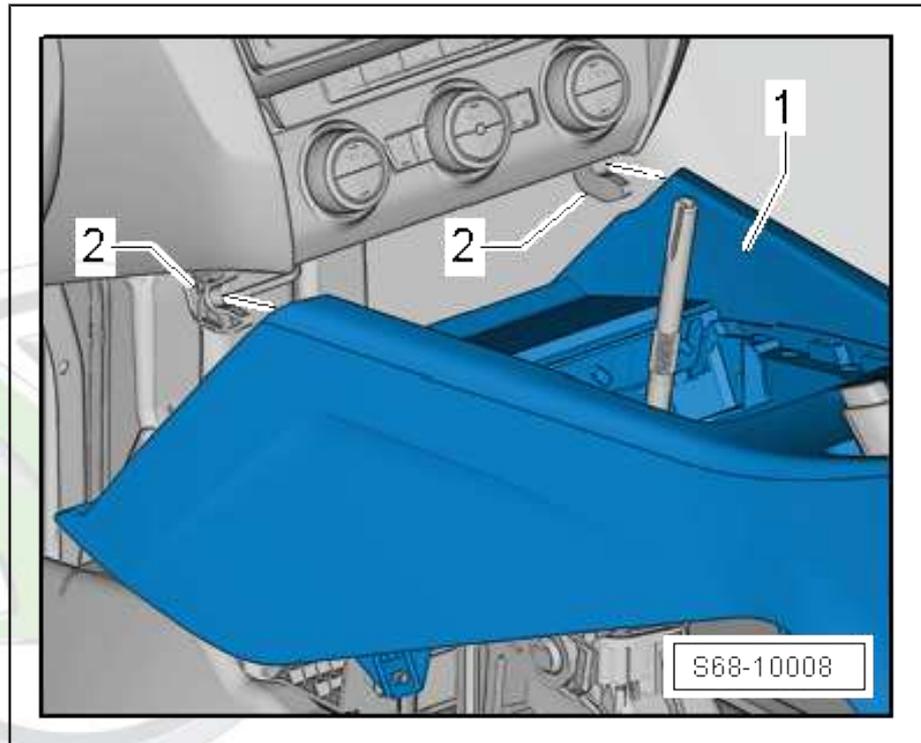


- If the console is provided with a storage compartment with a lid, disconnect the front glove compartment light connector => Electrical system - general information; Rep. gr. 96 .
- Remove centre console from vehicle.

Installing

- Installation is carried out in the reverse order.

3.3 Removing and installing the bracket for the centre console

Removing

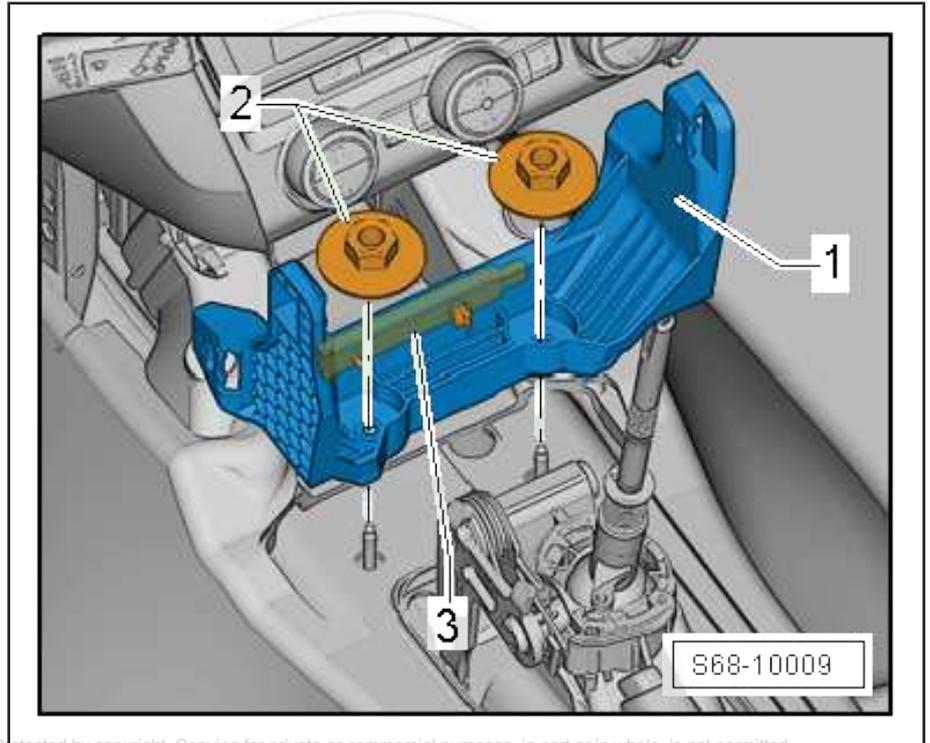

Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by SKODA AUTO A. S. SKODA AUTO A. S. does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by ŠKODA AUTO A. S.

- Remove the centre console or
⇒ [“3.2 Removing and installing centre console”, page 12](#) .
- Remove nuts (Pos. 2).
- Unclip the clips for the Kessy antenna - 3 -if present ⇒ Electrical system - general information; Rep. gr. 96 .
- Remove the bracket (Pos. 1) from the vehicle.

Installing

- Installation is carried out in the reverse order.