



### 3 Centre console

⇒ ["3.1 Summary of components - Centre console", page 10](#)


⇒ ["3.2 Removing and installing centre console", page 12](#)

⇒ ["3.3 Removing and installing the bracket for the centre console", page 18](#)

#### Tools

#### Special tools and workshop equipment required

- ◆ Removal wedge - 3409-

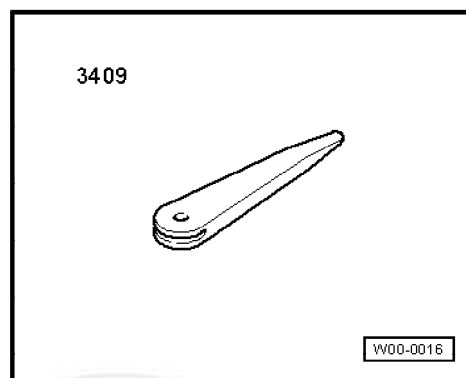


#### 3.1 Summary of components - Centre console



Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by ŠKODA AUTO A. S. ŠKODA AUTO A. S. does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by ŠKODA AUTO A. S.

- 1 - Centre console
- 2 - Armrest

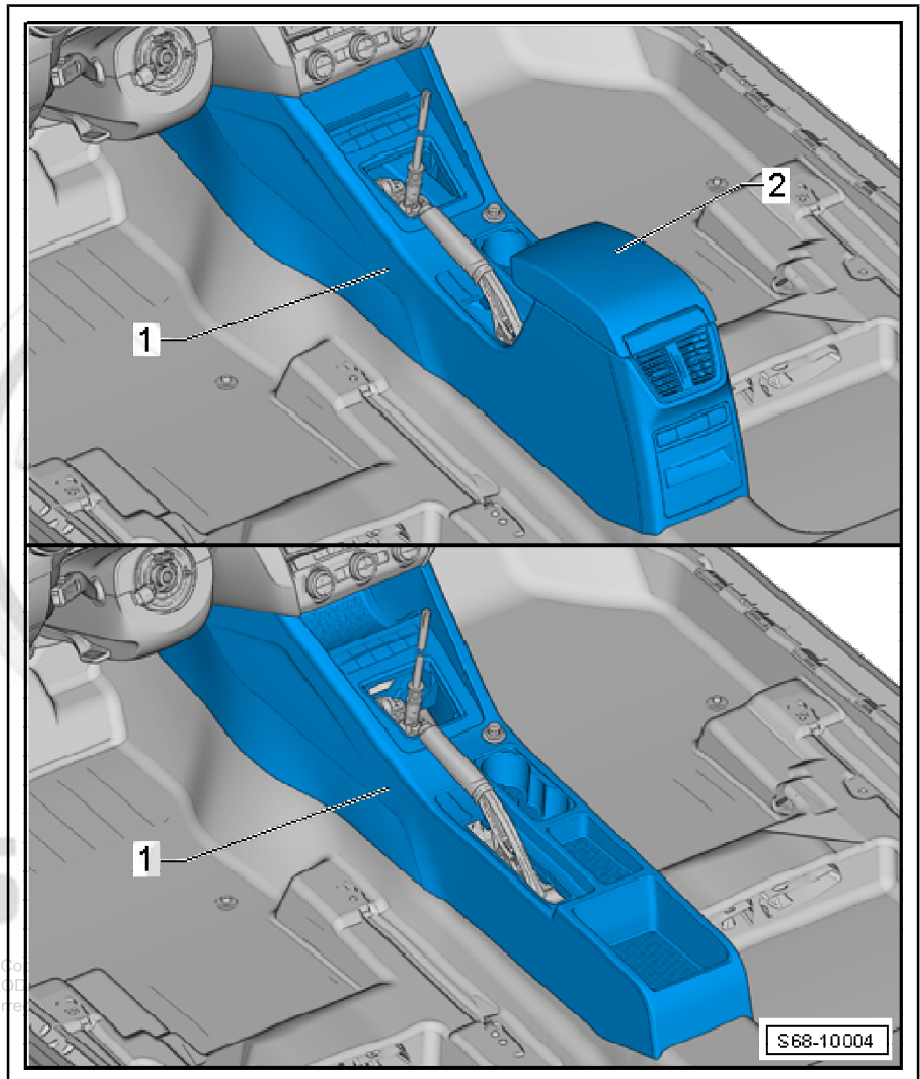

Protected by copyright, Co  
unless authorised by SKOD  
with respect to the corre



## 3.2 Removing and installing centre console

### 3.2.1 Removing and installing the centre console without armrest

1 - Left trim

2 - Centre console

Removing and installing  
⇒ [page 12](#) .

3 - Damping

4 - Cap of handbrake

5 - Screw

□ 1.5 Nm.

6 - Screw

□ 1.5 Nm.

7 - Screw

□ 1.5 Nm.


8 - Right trim

9 - Cap

□ The fixing screw for the  
centre console is located  
under the cap.

10 - Screw

□ 1.5 Nm.

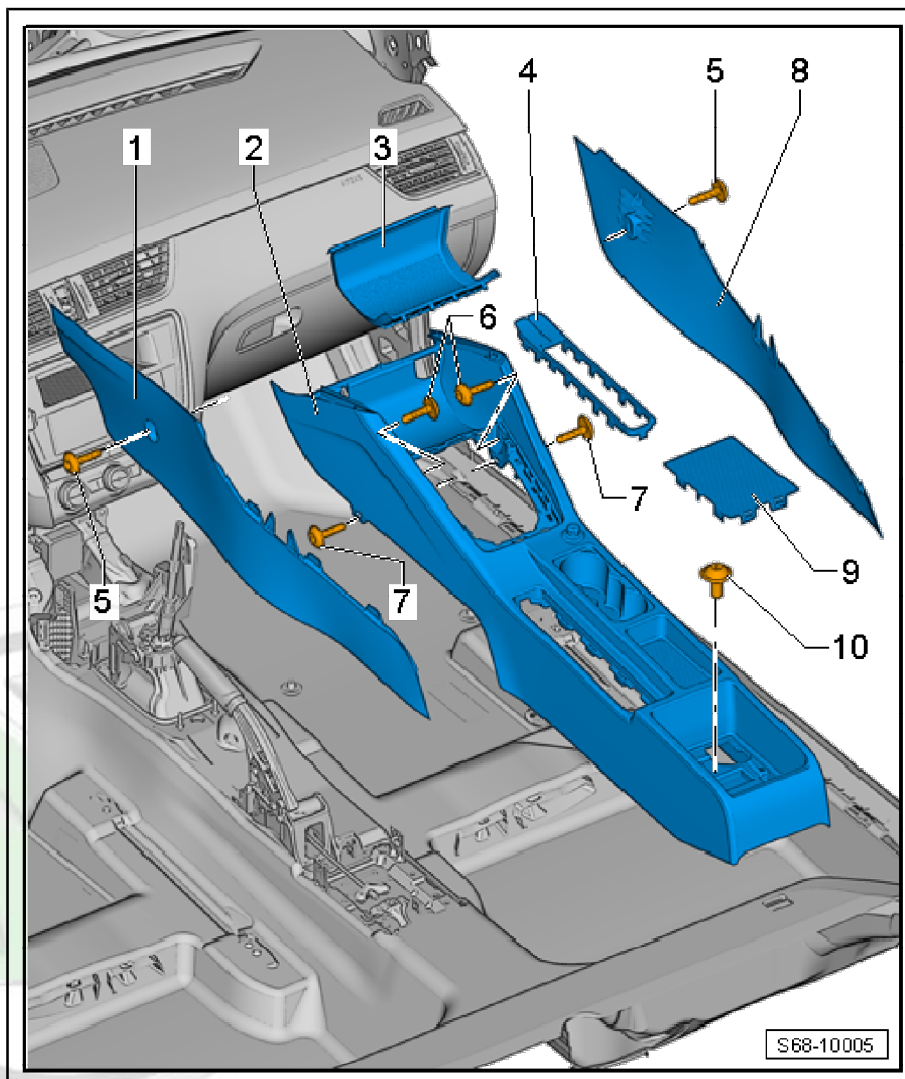


#### Removing

- Switch off the ignition and all electrical components.
- Unscrew the screws (Pos. 5) for the centre console trim in the footwell and pull off both panels downwards.
- Remove screws (Pos. 7).
- Unclip the switch cover trim and remove the ⇒ gearbox; Rep. gr. 34 .
- Remove screws (Pos. 6).
- Unclip the cover (Pos. 9) and remove the screw (Pos. 10).
- Apply handbrake fully.
- Unclip the cap on the handbrake (Pos. 4).
- If the console is equipped with Phonebox, disconnect the antenna.

- Partially raise the centre console at the rear, disconnect the cigarette lighter plug connection (socket) ⇒ Electrical system - general information; Rep. gr. 96 .
- Tilt the centre console - 1 - upwards at the back and unclip it by pulling it backwards out of the holders for the dash panel - 2 -.
- If the console is provided with a storage compartment with a lid, disconnect the front glove compartment light connector ⇒ Electrical system - general information; Rep. gr. 96 .
- Remove centre console from vehicle.

#### Installing

- Installation is carried out in the reverse order.

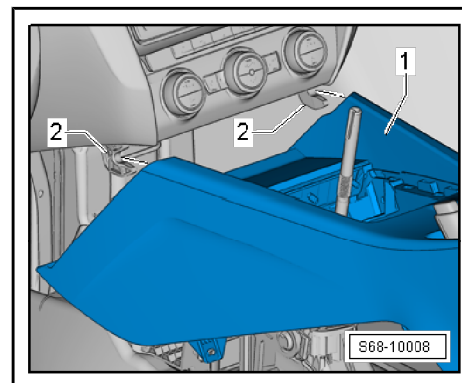

### 3.2.2 Removing and installing the centre console with armrest

#### 1 - Left trim


#### 2 - Centre console

Removing and installing  
⇒ [page 14](#) .

#### 3 - Storage tray

##### Removing

- Remove the side trim (Pos. 4).
- Unclip the switch cover ⇒ Gearbox; Rep. gr. 34 .
- Remove the antenna connector from the right side through the opening in the centre console (depending on the equipment).
- Unclip the storage tray in the front area and slide it out slightly upwards.
- Close the sliding hood for the storage tray and slide it forwards gradually.
- By gradually sliding out the storage tray, also gradually open the sliding hood so that the space above the storage tray is released.

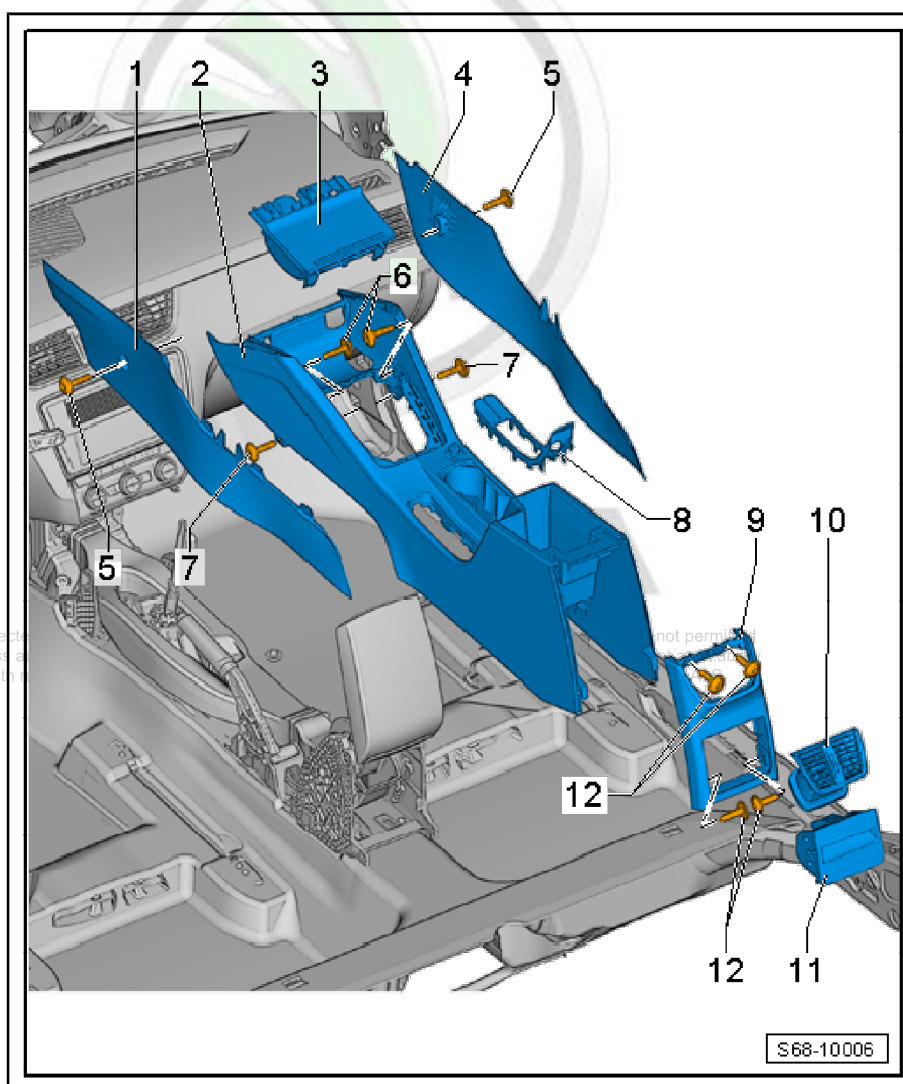

- After sliding out, disconnect the connector for the glove compartment light.
- Remove the storage tray from the centre console.

##### Installing

- Installation is carried out in the reverse order.