




6.3 Removing and installing the bottom trim panel for the tailgate

6.3.1 Removing bottom trim panel for the tailgate.

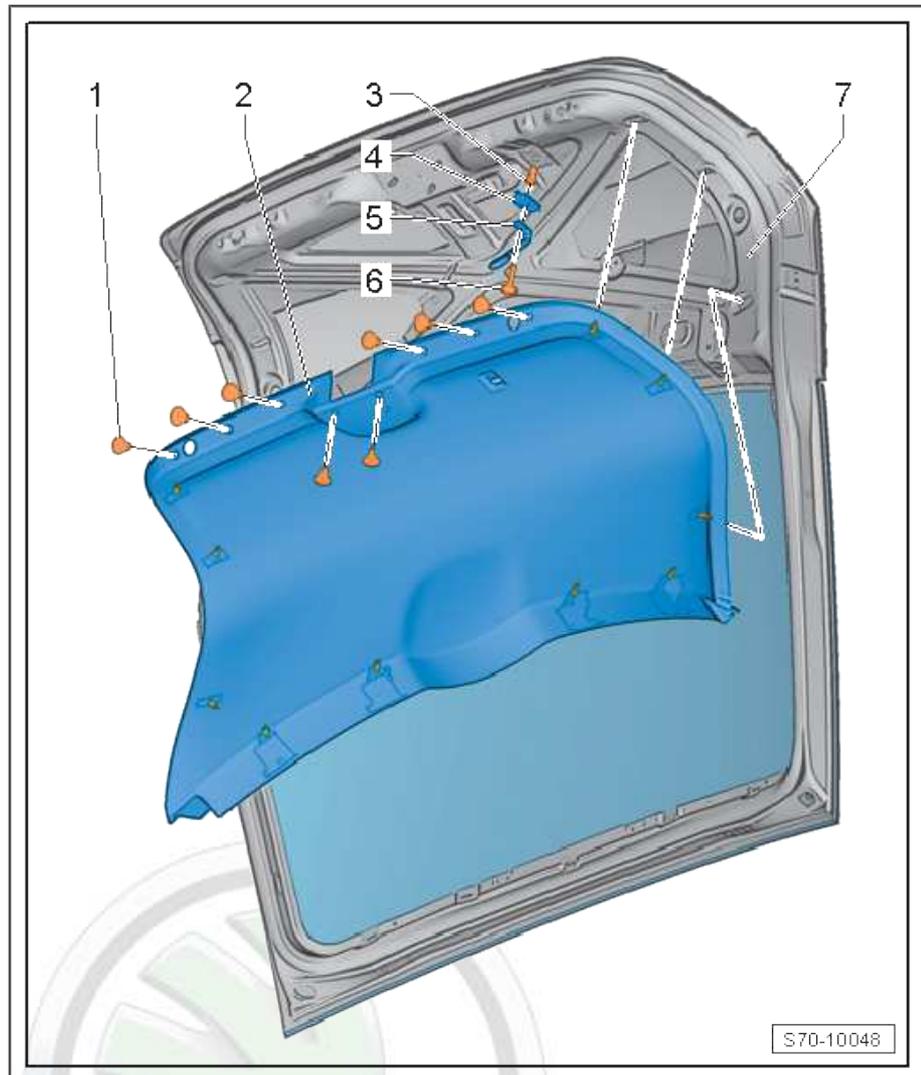

Removing

- Release screws -6- and remove the pull handle -5-.
- Remove cover for rear window wiper motor ⇒ Electrical System; Rep. gr. 92 .
- Unclip the plastic clips - 1 - in succession.
- Remove the trim panel - 2 - from the door - 7 - .


Installing

- Installation is carried out in the reverse order.

 Note

- ◆ Before the installation, check all the fixing elements for damage, if necessary replace.
- ◆ When installing, insert the tailgate trim into the door lock guide.

6.3.2 Remove tailgate trim (Octavia III - Combi)

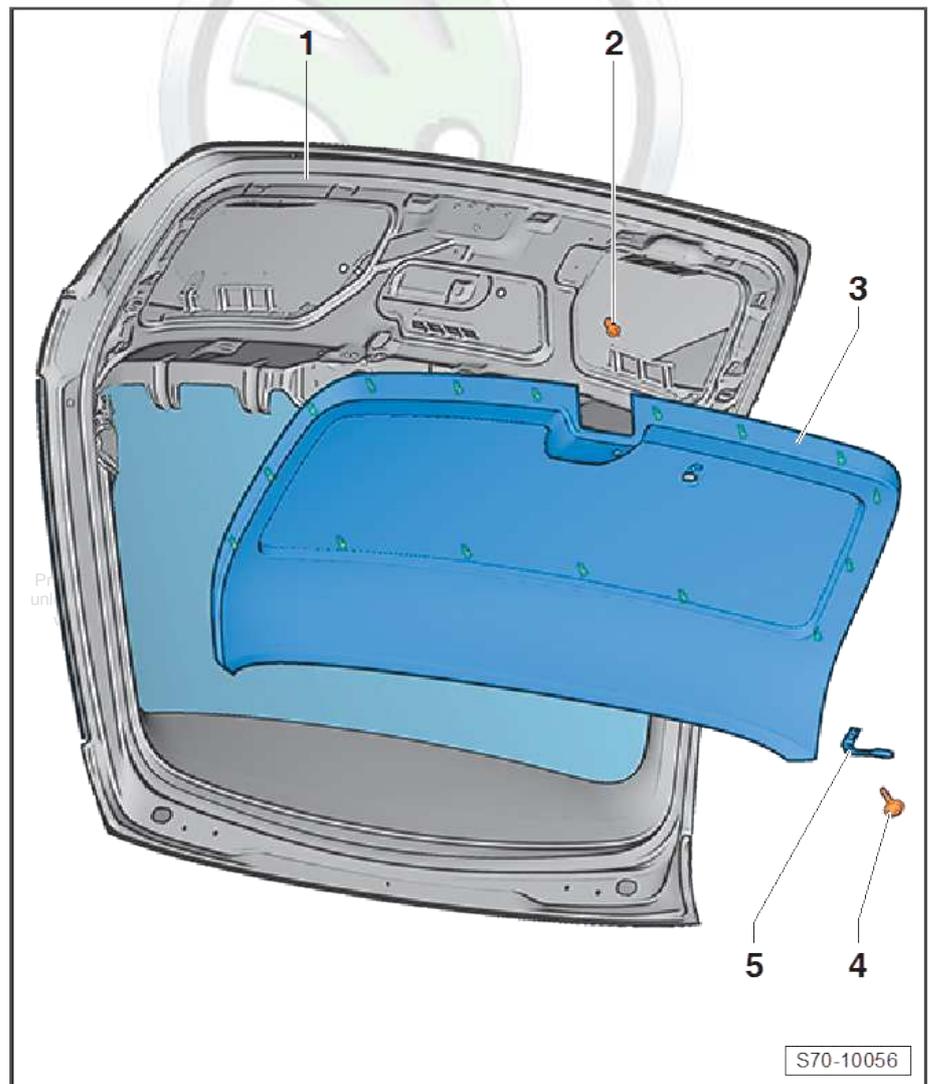

Removing

- Release screws -4- and remove the pull handle -5-.
- Unclip the clamps from the tailgate - 1 - one after the other.
- Plastic clip for screw -4-.
- Remove the trim panel -3- from the tailgate.

Installing

- Installation is carried out in the reverse order.



Note

- ◆ Before the installation, check all the fixing elements for damage, if necessary replace.
- ◆ When installing, insert the tailgate trim into the door lock guide.

6.4 Removing and installing the top trim panel for the tailgate

6.4.1 Remove top trim panel for tailgate.



Removing

- Unclip the retaining clips on the sides of the door.
- Unclip the retaining clips on the upper side of the door.
- Remove the trim panel.

Installing


- Push the trim panel onto the cover frame for the brake light
- 3-

- Clip the frame to the upper side of the door.
- Insert the tailgate trim under the trim panel ends.
- Clip in the windscreen trim at the sides.

i Note

Before the installation, check all the fixing elements for damage, if necessary replace.

6.4.2 Remove rear window trim (Octavia III - Combi)

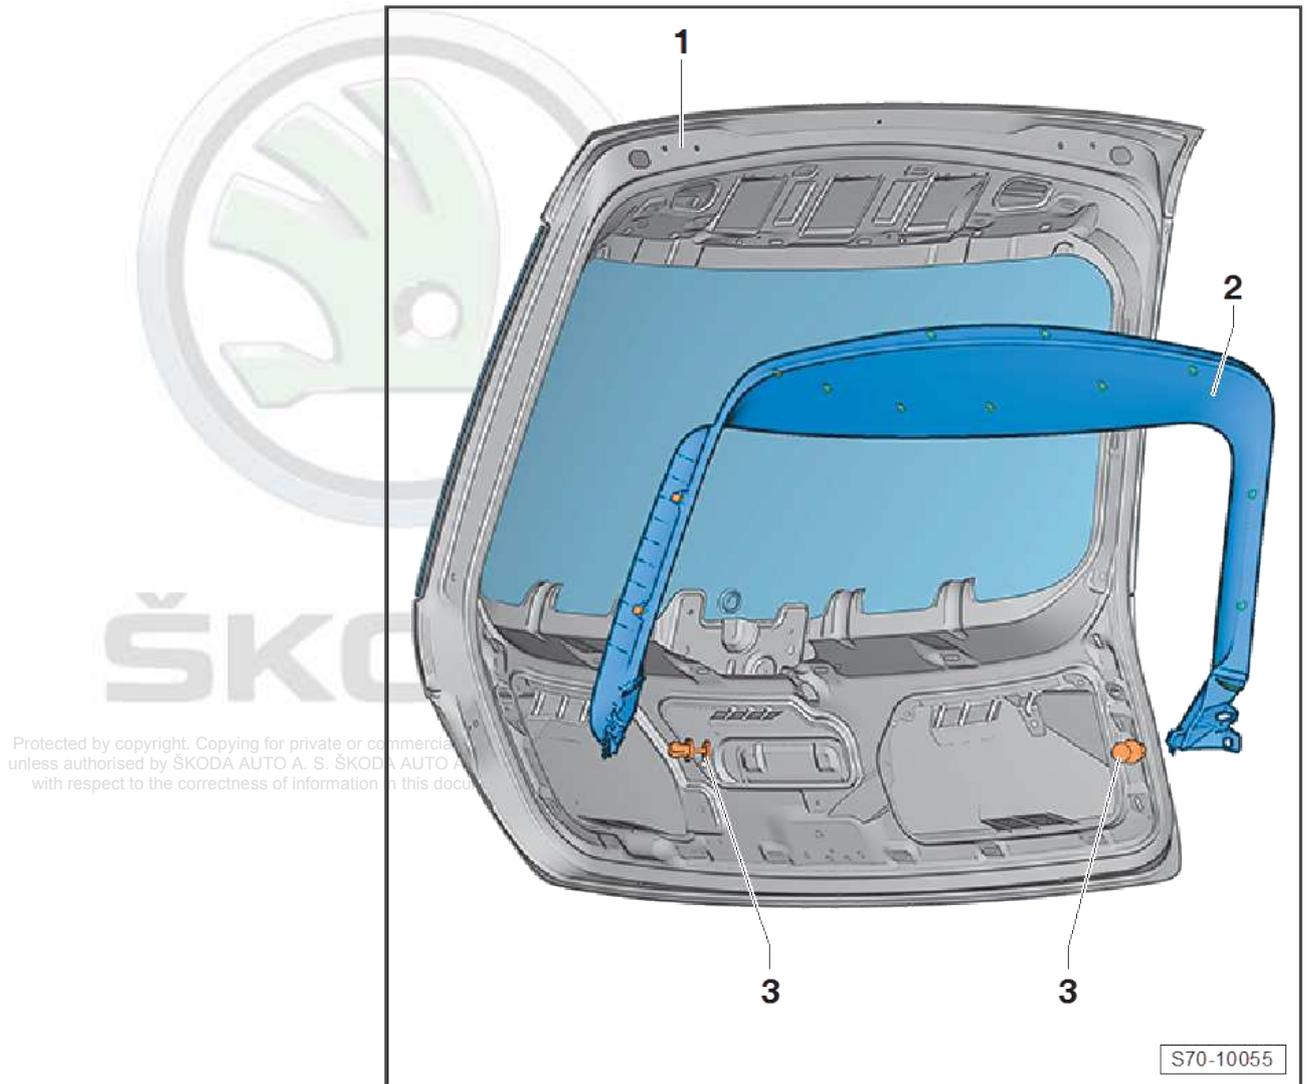

Removing

- Remove the tailgate trim panel
⇒ ["6.3 Removing and installing the bottom trim panel for the tailgate", page 140](#) .
- Release and remove the plastic rivets -3-.
- Unclip the retaining clips on the sides of the lid - 1 - .
- Unclip the retaining clips on the upper side of the lid - 1 - .
- Remove the trim panel -2-.



Installing

- Clip the frame to the top of the lid.
- Clip in the windscreen trim at the sides.
- Secure the lid with plastic rivets. - 3 - .



Note

Before the installation, check all the fixing elements for damage, if necessary replace.

6.5 Removing and installing the rear window shelf pad

1 - Top part of side luggage compartment trim panel

Removing

- Remove wheel house trim panel
⇒ [“5.3.3 Remove the wheel arch trim of the C-pillar.”, page 128](#) .
- Remove the trim panel of pillar C
⇒ [“5.3 Removing and installing trim panel of pillar C”, page 126](#) .
- Unscrew screw -1-.
- Unclip the trim panel out of the supports of the body.

Installing

- Installation is carried out in the reverse order.

2 - Expanding nut

3 - Screw

- 2.5 Nm.

